


Guide to Understanding Features

Invacare with its aim to making it simple for you to use our catalogue and products has provided a very simple key that gives you information at your fingertips.

Beds



Mattresses

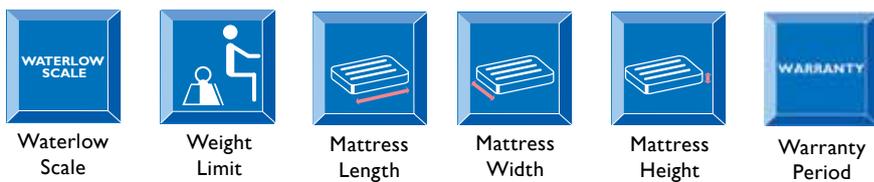

Symbol Guide

	Do not pierce or cut		Do not dry clean		Do not put near flame
	Wash at 80 °C		Do not bleach		User weight limit of 247 kg
	Cannot be tumble dried		Do not iron		Declaration of conformity


INVACARE® Softform Premier

High Risk

Equipped with a suite of features that ensures durability, sustained high degree of protection against tissue damage for the patient and an ingeniously designed insert pad, the Softform Premier mattress really does provide exceptional pressure reduction and comfort.



Full length flap conceals the zip reducing possible fluid ingress

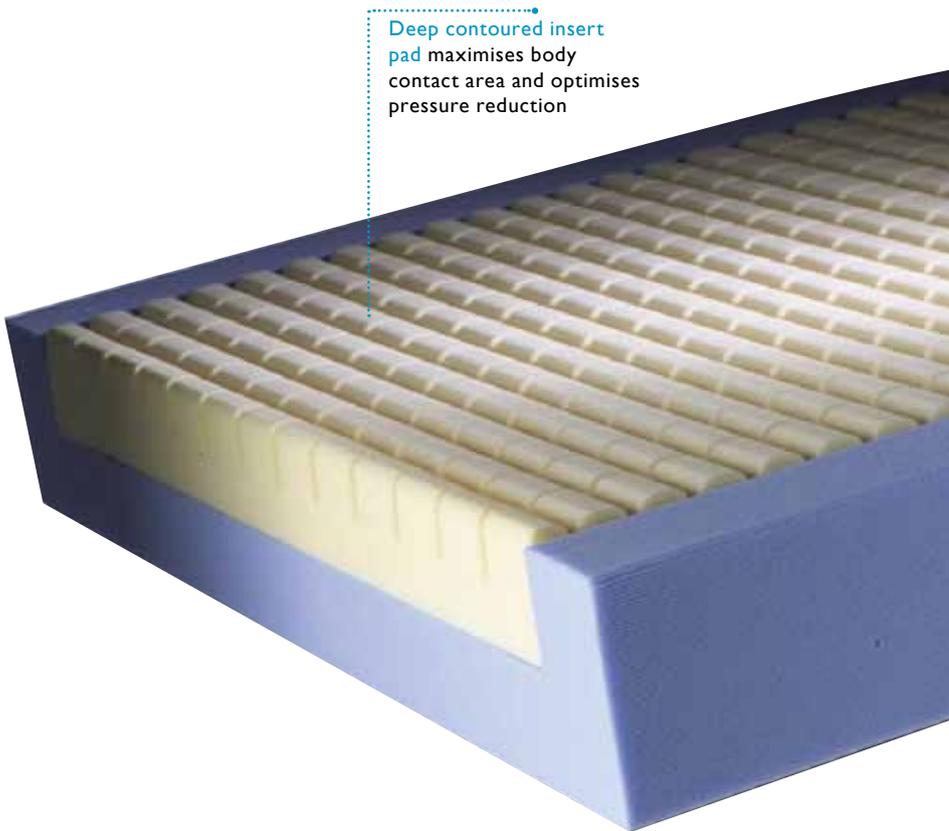

Deep contoured insert pad maximises body contact area and optimises pressure reduction

SPM-197/88



Features	Benefits
Deep contoured insert pad for enhanced pressure care area	Maximises body contact area and optimises pressure reduction
Modular construction	Add an insert and pump at a later date to convert to a Softform Premier Active mattress
Cover fabric conforms to deep contoured foam castellations on the upper surface of the insert pad when mattress is profiled	Minimises rucking of cover fabric on the top surface, reducing potential for tissue damage
Suitable for High Risk patients / Very High Risk when used in conjunction with a profiling bed	Can contribute significantly to pressure ulcer prevention
No need to turn over	Reduces manual handling issues
Single piece foam 'U' core	Facilitates patient transfer by providing effective side-wall support
Double-coated poly-urethane sides	Reduces the risk of strikethrough, hydrolysis or relamination
Two way stretch poly-urethane waterproof cover	Provides excellent recovery and durability and helps reduce shear and friction forces
High frequency welded seams and zip	Reduces risk of fluid ingress
Full length waterfall flap conceals the zip	Further risk reduction of fluid ingress (through zip)
Toughened PU coated base	Prolongs longevity of the mattress
Water penetration resistance	35 kPa minimum (BS 3424: part 26). 35 kPa minimum after 20,000 cycles Martindale Abrasion Test EN ISO 5470-2

Technical Specifications



20



247.6kg



197cm



88cm



15.2cm



4 yr cover
8 yr foam